


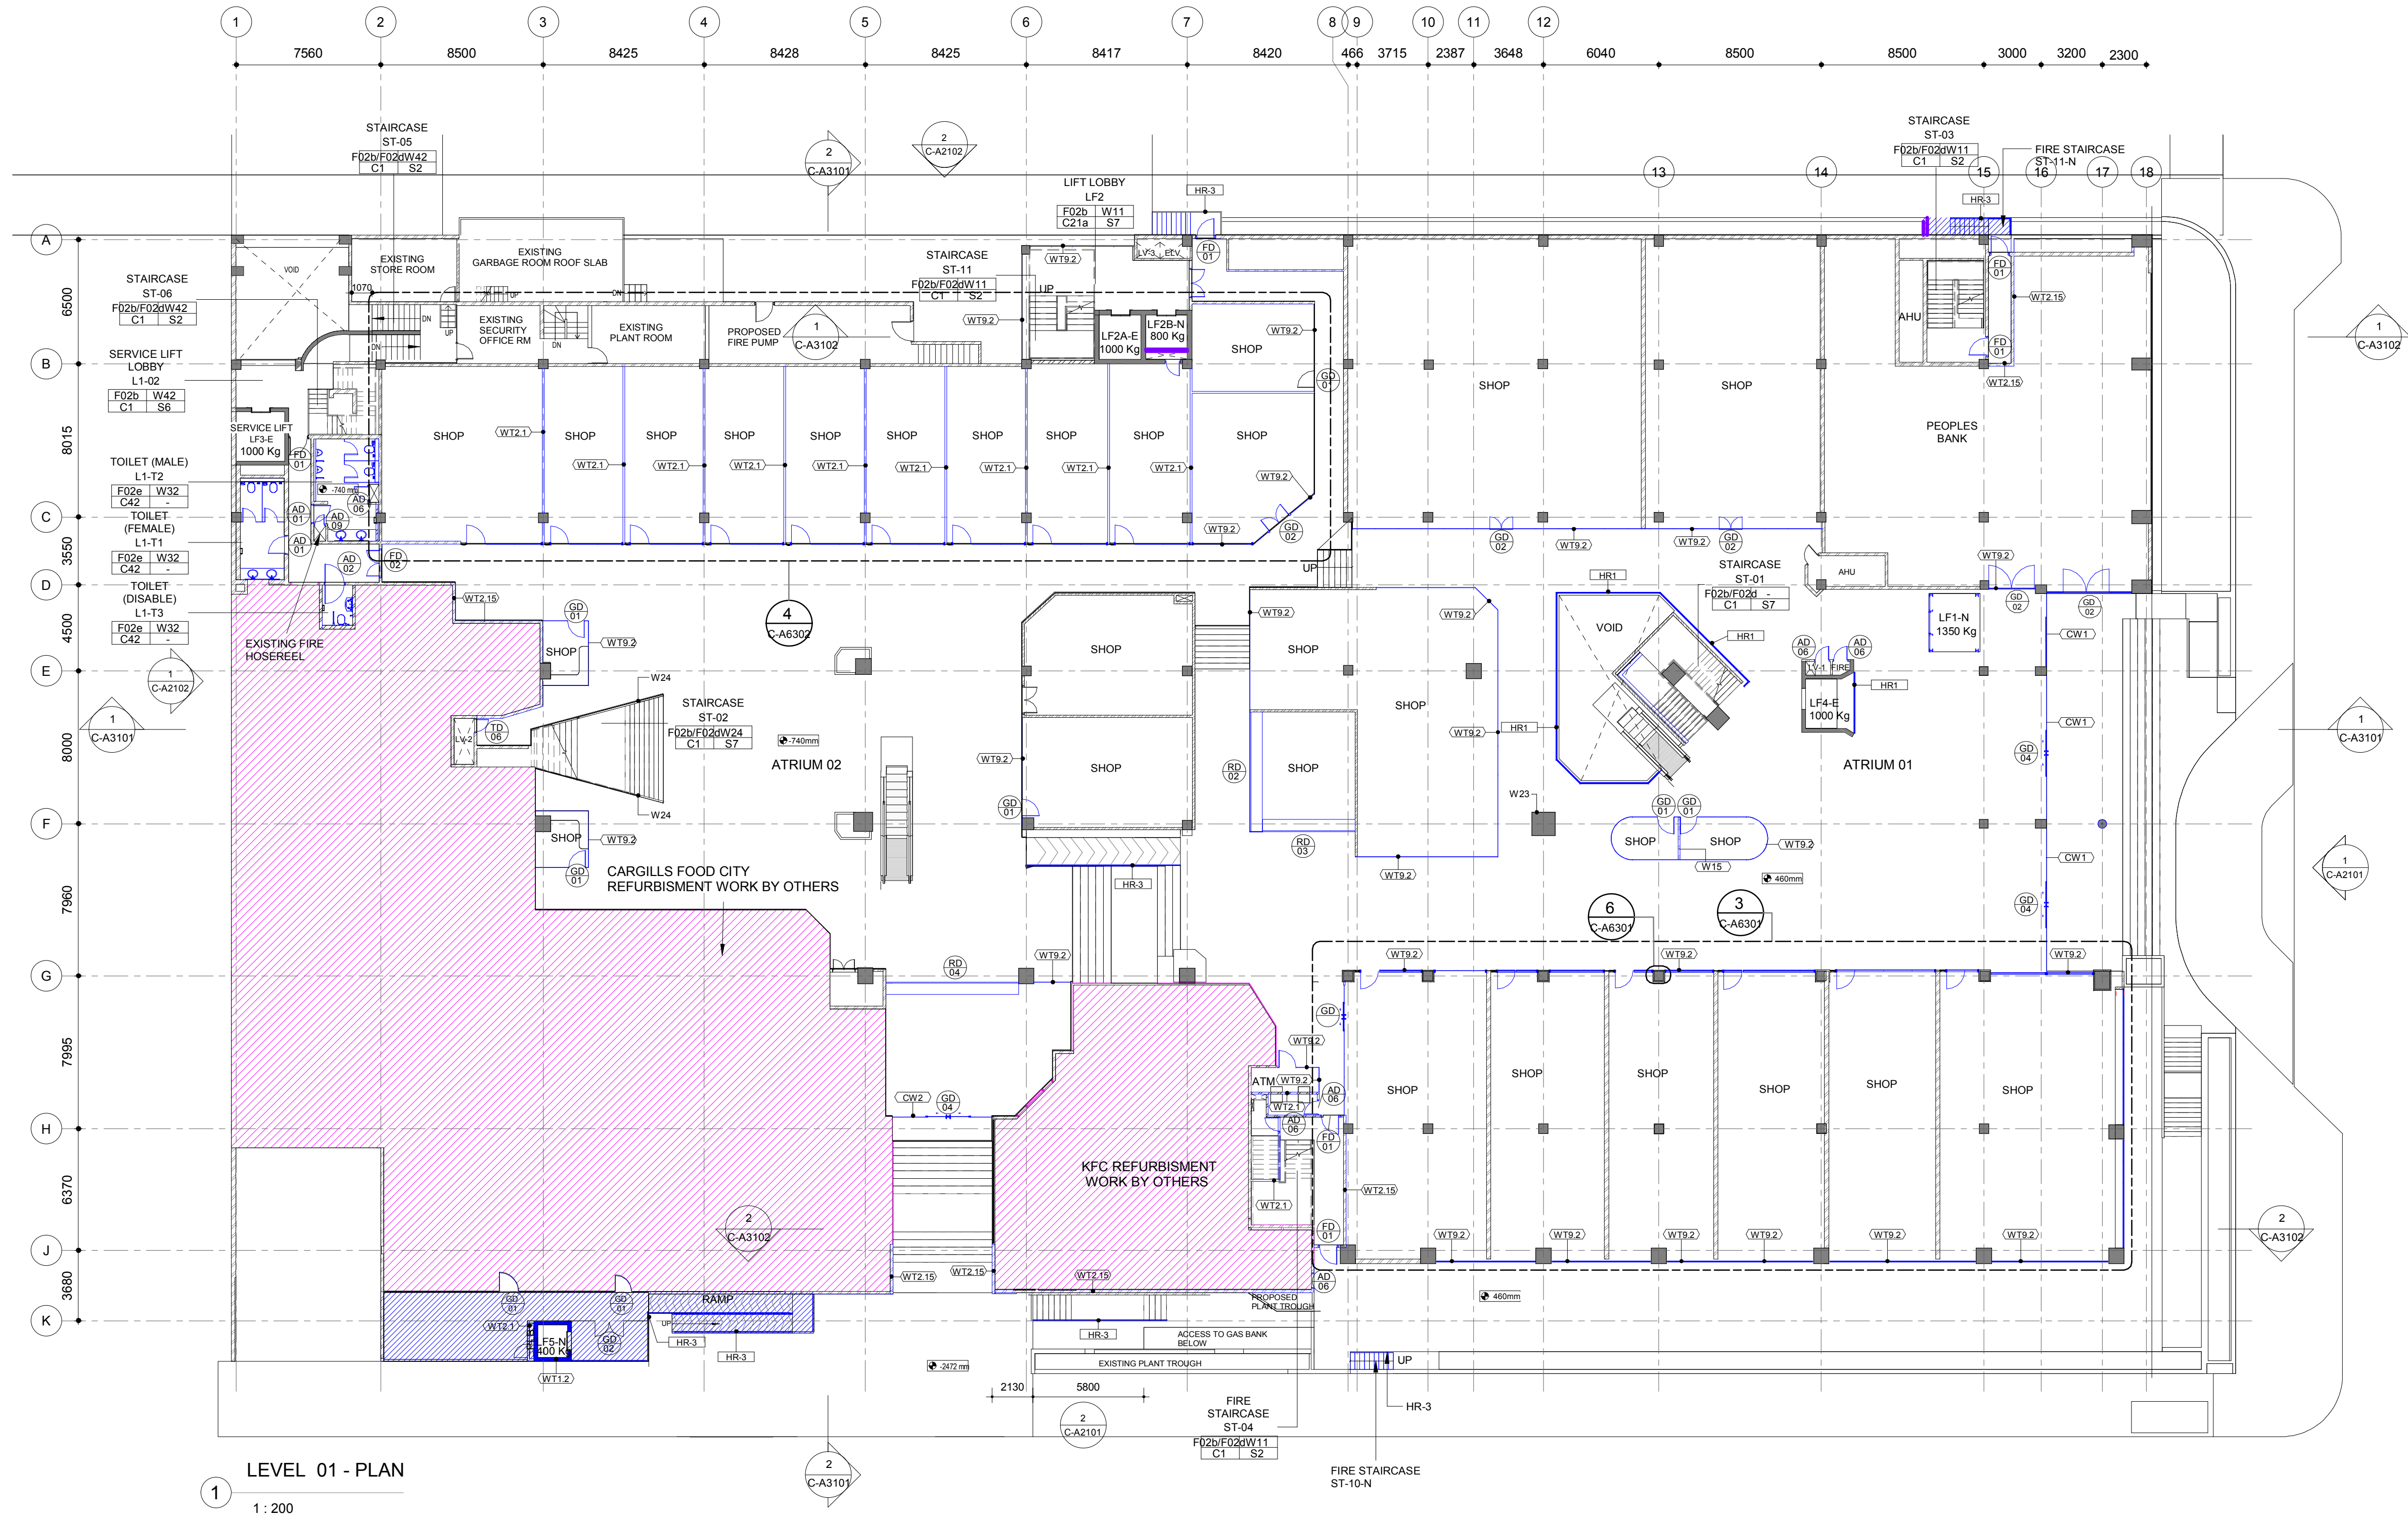

SER. NO.	LABEL / LOCATION	DESCRIPTION
01)	LOCATIONS TO BE IDENTIFIED AT SITE	STRUCTURAL DEFECTS RECTIFICATION & WATERPROOFING WORK AS PER STRUCTURAL SPECIFICATION
	STAIRCASE ST-02 STAIRCASE ST-03 STAIRCASE ST-04 STAIRCASE ST-05 STAIRCASE ST-06	1) RETILING OVER EXISTING TILES, WALL REPAIRING & SKIRTING STAIRCASE RUNS FROM LEVEL 01 TO LEVEL 02 2) RETILING OVER EXISTING TILES, WALL REPAIRING & SKIRTING (ON ALL LEVELS) STAIRCASE RUNS FROM LEVEL 01 TO LEVEL 05 3) RETILING OVER EXISTING TILES, WALL REPAIRING & SKIRTING STAIRCASE RUNS FROM LEVEL 01 TO LEVEL 02 4) RETILING OVER EXISTING TILES, WALL REPAIRING & SKIRTING (ON ALL LEVELS) STAIRCASE RUNS FROM LEVEL 01 TO LEVEL 05
02)	EXISTING KFC ENTRANCE AT STATION ROAD (ENTRANCE TO NEW CARGILLS)	1) DEMOLISHING EXISTING REINFORCED CONCRETE EXTERNAL STAIRCASE 2) REMOVING LANDSCAPED AREA 3) PROPOSED NEW CONCRETE RAMP AS PER DETAIL DRAWINGS 4) PROPOSED NEW PASSENGER LIFT FROM LEVEL 01 TO LEVEL 02 (L1-L5) 5) PROPOSED LIFT LOBBY AREA SLAB, WALLS & FINISHES 6) EXISTING WALL PORTION AS SHOWN ON PLANS 7) EXTENDING/RELOCATING EXISTING FIRE HYDRANT INLET
03)	NEW LIFT (LF5-N) LOBBY AREA	STATION ROAD EXTERIOR SOLID AND GLAZED WALLS AS SHOWN ON PLANS
04)	ENTRANCE AT GALLE ROAD	1) REMOVING EXISTING TILE AND TILE BED, WATERPROOFING APPLICATION ON EXISTING STRUCTURE AND RETILING 2) REPLACING ENTRANCE GLASS WALL WITH CURTAIN WALL GLAZING AND SENSOR DOORS
05)	ENTRANCE AT STATION ROAD	1) RETILING WITH NEW FLOOR TILES (TILE ON TILE), WALL FINISHES AS INDICATED 2) DEMOLITION OF EXISTING ENTRANCE GLAZING AND CONSTRUCTION OF NEW ENTRANCE GLAZING IN NEW LOCATION AS SHOWN ON PLANS WITH SENSOR DOOR 3) DEMOLITION OF EXISTING PONDS
06)	STATION ROAD ENTRANCE LOBBY	1) RELOCATING MC RADIO (PA SYSTEM) TO RECEPTION AREA 2) DEMOLITION OF BEAM & INSTALLATION OF CEILING BULKHEAD IN BEAM AREA AND FIXING OF CUSTOM ROLLER DOOR 3) RETILING OVER EXISTING TILE, WALL REPAIRING/GLAZING, WAFFLE CEILING REPAIRING
07)	FIRE ESCAPE ROUTE LINK TO STATION ROAD ST-10-N	1) NEW CONCRETE STAIRCASE ADDED AS FIRE ESCAPE ROUTE TO CONNECT EXISTING SLAB TO STATION ROAD AS PER DETAILED DRAWING (EXISTING GAS STORE AREA AT B2 LVL IS REARRANGED TO ACCOMMODATE SAME) 2) FORMING SMOKE-FREE LOBBY WITH FIRE DOOR
08)	FIRE ESCAPE ROUTE LINK TO ARTHUR'S PLACE ST-11-N	1) PROVIDE PASSAGE ADJACENT TO STAIRCASE ST-03 AS PER DETAILED DRAWINGS 2) NEW CONCRETE STAIRCASE & SLAB PORTION TILED TO CONNECT EXISTING SLAB TO ARTHUR'S PLACE ROAD, CONSTRUCTION INVOLVES EXISTING PLANT TROUGH & RETAINING WALL PART DEMOLITION, NEW HANDRAILS ADDED.
09)	COMMON AREAS-COMMON CORRIDORS, LOBBIES	1) RETILING (OVER EXISTING TILE) 2) WALL REPAIRING 3) CONDUITING FOR NEW LIGHT FITTINGS, WAFFLE CEILING REPAIRING 4) 20% LIGHTING IMPROVEMENTS 5) EXISTING STRIP METAL CEILING & LIGHT FITTINGS TO BE DISMANTLED & REFIXED AFTER COMPLETION OF SPRINKLER INSTALLATION & LIGHT CONDUITING WORK, CEILING MODIFICATIONS TO BE CARRIED OUT AS NECESSARY 6) NEW HANDRAILS AS SHOWN IN PLANS 7) WIDENING OF RAMP AS SHOWN IN PLANS 8) REPLACING EXISTING FIREDOOR OPENING TO THE SERVICE AREA (TOILET BLOCK) 9) WALLS/COLUMNS TO BE CLADDED AS SHOWN IN DETAIL DRAWINGS
10)	SHOPS & SHOP FRONTS	1) REPLACING ALL EXISTING GLASS SHOP FRONTS WITH NEW ALUMINUM FRAMED TOUGHENED GLASS SHOP FRONTS WITH PIVOTED FRAMELESS GLASS DOORS UNLESS OTHERWISE SPECIFIED WITH AL COMPOSITE GLAZING PANEL FOR SIGNAGE PROVISION 2) INTRODUCTION OF MANUAL DAMPERS FOR ALL SHOPS - HVAC SCOPE
11)	MALE & FEMALE TOILETS (L1-T1 & L1-T2) (REAR) DISABLED TOILET (L1-T3)	1) M & F TOILET REFURBISHMENT (FEMALE TOILET IS REARRANGED) - DEMOLITION OF EXISTING FLOOR FILLING, REWATERPROOFING, RELAYING OF NEW TILE BED & FLOOR TILES, NEW WALL TILES, REPLACING ALL PARTITION WALLS, CEILINGS, SANITARY & LIGHT FITTINGS, EXTENSION OF CONCRETE VANITY REPLACING EXISTING GRANITE FINISH WITH NEW SOLID SURFACE FINISH (CONCRETE VANITIES TO BE REUSED IF/WHERE POSSIBLE) AS SHOWN ON DETAIL DRAWINGS 2) NEW DISABLED TOILET (WITH WATERPROOFING) AS SHOWN ON DETAIL DRAWINGS
12)	ATRIUM 01 AREA	1) DEMOLITION OF EXISTING PONDS & PLANT TROUGHS 2) RETILING FLOOR & STAIRCASE (OVER EXISTING TILE) 3) REPLACING EXISTING VOID AREA ALUMINUM FRAMED GLASS HANDRAIL WITH PROPOSED NEW GLASS HANDRAIL, STAIRCASE HANDRAIL TO BE REPLACED WITH NEW GLASS HANDRAIL AS SPECIFIED 4) NEW OPEN KIOSK 5) NEW DISPLAY KIOSK (PROMOTIONAL & NAVIGATIONAL PURPOSES) & VIDEO WALL 6) COLUMNS TO BE CLADDED IN STONE AS SHOWN IN DETAIL DRAWINGS 7) LIFT-N NEW PASSENGER LIFT & STRUCTURE 8) REPLACING EXISTING LV & FIRE DUCT DOORS AS SHOWN ON PLAN
13)	ATRIUM 02 AREA	1) DEMOLITION OF EXISTING PONDS, PLANT TROUGHS & TIMBER STAGE 2) RETILING FLOOR & STAIRCASE (OVER EXISTING TILE) 3) NEW OPEN SHOP/KIOSKS 4) NEW DISPLAY KIOSK (PROMOTIONAL & NAVIGATIONAL PURPOSES) 5) SERVICE LINE PROVISION (WATER & DRAINAGE LINE) FOR COFFEE SHOP
14)	NEW LIFTS LF1-N, LF2B-N & LF3-N	1) LIFT-N NEW PASSENGER LIFT & STRUCTURE AT GALLE ROAD ENTRANCE (ATRIUM 1) 2) LF2B-N NEW LIFT AT ARTHUR'S PLACE CIRCULATION CORE 3) LF3-N NEW PASSENGER LIFT AT STATION ROAD FROM LEVEL 01 TO LEVEL 02
15)	EXISTING LIFTS LF2A-E & LF3-E	EXTENSION OF EXISTING LIFTS UP TO LEVEL 05 1) LF2A-E FACING ARTHUR'S PLACE 2) LF3-E SERVICE LIFT
16)	MEP WORK	1) WIRING IMPROVEMENTS 2) INSTALLATION OF FIRE SPRINKLER SYSTEM 3) INSTALLATION OF FIRE DETECTION SYSTEM (SMOKE DETECTORS) 4) REHABILITATION OF DAMAGED HVAC DUCTING & INTRODUCTION OF MANUAL DAMPERS FOR ALL SHOPS 5) BMS RELATED ELECTRICAL INSTALLATION LIGHTING CONTROLLING BY TIME SCHEDULING FOR COMMON AREAS & OUTDOOR LIGHT POINTS REPLACING OF EXISTING CONVENTIONAL ENERGY METERS BY BMS COMPATIBLE ENERGY METERS WITH REMOTE BILLING LOCAL SOFTWARE 6) RELOCATION OF EXISTING SERVICE LINES LOCATED IN PRESENTLY UNOCCUPIED LIFT CORE VOID TO PROVIDE ROOM FOR NEW L2B LIFT
17)	GENERAL	1) INSTALLATION OF INTERNAL GENERAL SIGNAGE 2) NEW ACCESS PATH TO ELECTRICAL PANEL ROOM 3) INTRODUCTION OF AIR CONDITIONED ATM ROOMS
18)	EXTERNAL WORK	1) DEMOLITION WORK, EXTERIOR PAINTING, DECORATIVE CEILING CANOPY, FLOORING, PAVING, FLOWER TROUGH IMPROVEMENTS, LIGHTING, DROP-OFF AREAS AT STATION ROAD & GALLE ROAD & LANDSCAPING AS SHOWN IN DETAILED DRAWINGS 2) REMOVING EXISTING STEEL GUARD RAILS WITH NEW GUARD RAILS

COLOR CODE	ABBREVIATIONS
BLUE - PROPOSED NEW BUILDING ELEMENTS	IN LIFTS :
BLACK - EXISTING BUILDING ELEMENTS REMAINED	LF-N - NEW LIFTS
MAGENTA REFURBISHED BY OTHERS (CARGILLS FOOD CITY & KFC AREAS)	LF-E - EXISTING LIFTS
CONSTRUCTION DRAWINGS	

PRINCIPAL CONSULTANT		CLIENT	MAIN CONTRACTOR - CIVIL WORKS		ELECTRICAL & FIRE PROTECTION CONTRACTOR		MVAC CONTRACTOR		REVISION	DESCRIPTION	DATE	PROJECT	PROJECT NO	DRAWING TITLE	SHEET NO				
D G 5 The Design Group Five International (Pvt) Ltd. 03, Anderson Road, Colombo - 05, Sri Lanka. www.dgfive.com		Majestic City C T LAND DEVELOPMENT PLC Company Registration No. PQ - 159 10, Station Road, Bambalapitiya, Colombo - 04. Tele: +94 112 508 873/4, +94 112 588 827/8 Fax: +94 112 592 427 info@majesticcity.lk www.majesticcity.lk	BML Buildmart Lanka (Pvt) Ltd. 25 & 25B, Jesmin Gardens, Nawala, Rajagiriya, Sri Lanka. Tele: +94 115 341 886, +94 115 360 607 Fax: +94 112 806 677 info@buildmart.lk www.buildmart.lk	ILLUKKUMBURA INDUSTRIAL AUTOMATION (PVT) LTD ILLUKKUMBURA Industrial Automaion (Pvt) Ltd. No: 655/1, Gunathilaka Gardens, Elvitigala Mawatha, Colombo 05, Sri Lanka. Tele: +94 115 941 886, +94 115 945 000 Fax: +94 11 366 874 iluko@silnet.lk www.ilukauto.com	Abans Abans PLC - Central Air Conditioning Department No: 206/8, Lake Drive, Rajagiriya, Sri Lanka. Tele: +94 115 776 949, +94 115 776 950 Fax: +94 115 945 000 lgmultiv@abansgroup.com https://cac.abansgroup.com														
												PROPOSED INTERIOR AND EXTERIOR REFURBISHMENT FOR MAJESTIC CITY 10, STATION ROAD, COLOMBO 04.	1568	LEVEL 01 PLAN	C-A1103				
												DRAWN BY AD	CHECKED BY LP	APPROVED BY RP		SHEET SIZE	SCALE	1 ST ISSUED DATE	REVISION
																A1	As indicated	22.01.2025	R0
												FILE PATH							